


### Electric Spindle for Numerical Control Engraving Machine

Spingdle type	Speed (r/min)	Motor				Dimensions(mm)							Bearings type
		KW	V	A	H2	D	D1	oint of spindle nose	L	L1	L2	Lub	
ADX150-9-18Z/5	9000	5	269	14.2	300	150	110	ER25-Φ12.7	345	32	43	Grease	2×B7007C/P4
	18000		380		600								2×B7006C/P4
ADX150-24Z/4.5	24000	4.5	293	10.4	400	150	94	ER25-Φ12.7	235	50	32	Grease	2×B7006C/P4
													2×B7005C/P4
ADX150-24Z/7.3HB	24000	7.3	293	15.5	400	150	112	ER20	281	33	33	Grease	2×B7006C/P4
													2×B7005C/P4
ADX100-15Z/3. 6B	15000	3.6	380	7.2	250	100	--	ER20	281	33	33	Grease	2×7007C/P5
													2×7005C/P5
ADX58-24Z/0.8A	24000	0.8	220	2.3	400	58	44	ER11	197	23	18	Grease	2×B7002C/P4
													1×6001C/P5
ADX100-24Z/3.2B	24000	3.2	380	6.5	400	100	80	ER20	249	28	33	Grease	2×7005C/P4
			220	11.4	400								2×7004C/P4
ADX125-18Z/5.5B	18000	5.5	380	8.9	300	125	96	ER25	307	17	28	Grease	2×B7007C/P4
													2×B7005C/P4
ADX150-24Z/6	24000	6	293	15.5	400	150	104	ER20	297	40	25	Grease	2×B7007C/P4
													2×B7005C/P4
ADX62-24Z/0.8	24000	0.8	220	2.2	400	62	55	ER11	206	10	20	Grease	B7002C/P4
													B7000C/P4
ADX60-24Z/0.25A	24000	0.25	220	1.2	400	60	55	ER11	179	10	19	Grease	2×B7002C/P4
													1×6000VVC/P5

### Electric Spindle for Numerical Control Engraving Machine

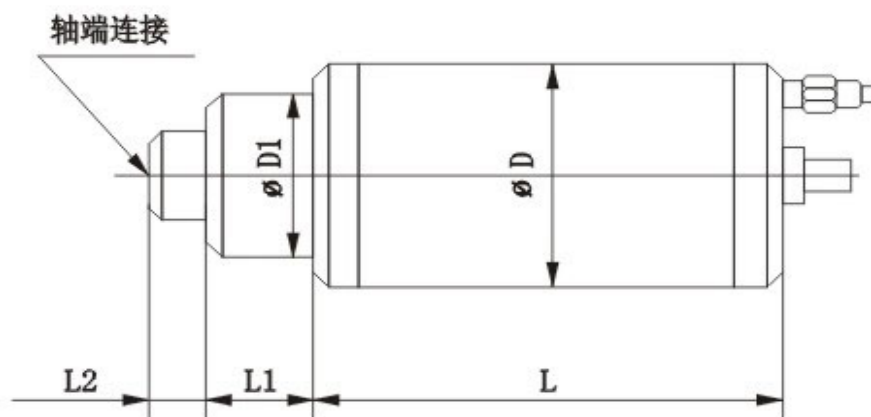

Spingdle type	Speed (r/min)	Motor				Dimensions(mm)							Bearings type
		KW	V	A	H2	D	D1	Joint of spindle nose	L	L1	L2	Lub	
ADX80-42Z/1.2	42000	1.2	220	4.9	700	80	57	ER11-Φ6	159	17	20	Grease	1×B7002C/P4
													1×B7002C/P4
ADX85-24Z/1.5	24000	1.5	220	5.5	400	85	81	ER16-Φ6	223	18	31	Grease	1×7005C/P4
													1×7003C/P4
ADX100-12Z/1A	12000	1	220	3.8	200	100	80	ER20-Φ10	175	28	31	Grease	2×7005C/P4
													1×6003VVC3/P5
ADX100-24Z/2.2G	24000	2.2	220	7.8	400	100	80	ER20-Φ12.7	220	28	38	Grease	2×7005C/P4
													1×6003VVC3/P5
ADX100-24Z/2.2B	24000	2.2	220	7.8	400	100	80	ER20-Φ12.7	240	28	38	Grease	2×7005C/P4
													2×7003C/P4
ADX110-18Z/3.2A	18000	3.2	380	6.4	300	110	108	ER25-Φ10	271	10	50.5	Grease	2×7007C/P4
													1×7005C/P4
ADX62/110-12-24Z/2.5	12000	2.5	220	10	200	110	62	ER16-Φ6	181	195	28		4×7005C/P4

	24000				400							Grease	1×7004C/P4
ADX85/110-12-24Z/2.5	12000	2.5	220	10	200	110	85	ER20-Φ6	226	120	35	Grease	2×7006C/P4
	24000				400								2×7005C/P4
ADX112-18Z/3.2A	18000	3.2	380	6.4	300	112	135	ER25-Φ10	271	10	50.5	Grease	2×7007C/P4 1×7005C/P4
ADX120-4-12Z/0.9A	4000	12000	0.9	127	5.6	66.7	81	M32X1.5	262	12	26	Grease	2×7007C/P4
				200		200							1×6004
ADX120-8Z/2.5	8000	2.5	380	5	133	120	81	ER25-Φ10	332	12	26	Grease	2×B7007C/P4 2×B7006C/P4
ADX140-9-14Z/5.5	9000	5.5	380	11	450	140	115	ER32-Φ20	302	91	45	Grease	3×7010C/P4ceramic
	14000				600								2×7208C/P4 ceramic
ADX100/150-8Z/3	4000	3	220	8.4	133	150	100	ER25-Φ12.7	247	160	28	Grease	3×7007CTA/P4
	8000		311		266								1×6006VV/P5

**Contact Us:**

**Anyang General International Co.,Ltd**

Add: Suite A, 4/F Jinhao Business Bld., Renmin Rd., Anyang, Henan, P.R.C.

Zip Code: 455000

Tel: (86) 372 5965148

Fax: (86) 372 5951936

[Http://www.gcmachines.com](http://www.gcmachines.com)

E-mail: [info@agico.com.cn](mailto:info@agico.com.cn)